


SMW  
600MHz VCO  
広帯域製品  
試験成績書

発振周波数、振幅特性

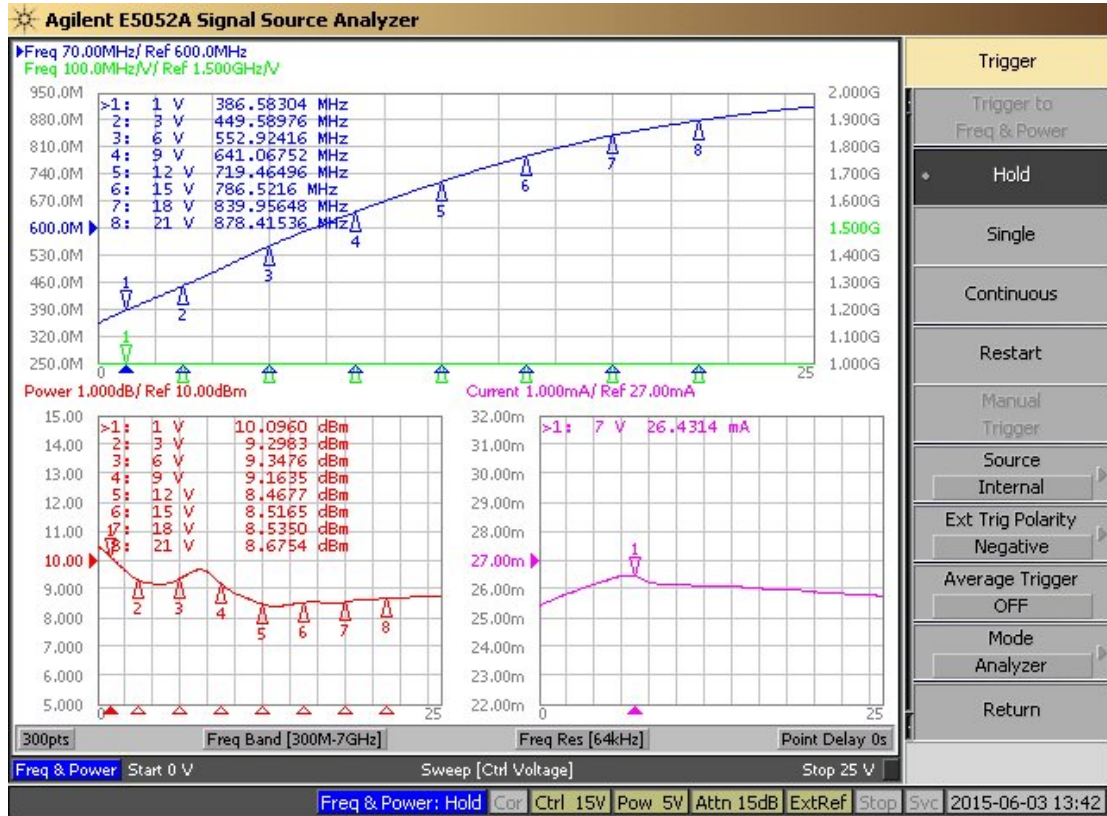

**Trigger**

Trigger to Freq & Power

Hold

Single

Continuous

Restart

Manual Trigger

Source Internal


Ext Trig Polarity Negative

Average Trigger OFF

Mode Analyzer

Return

位相雑音 (Vt=3V)

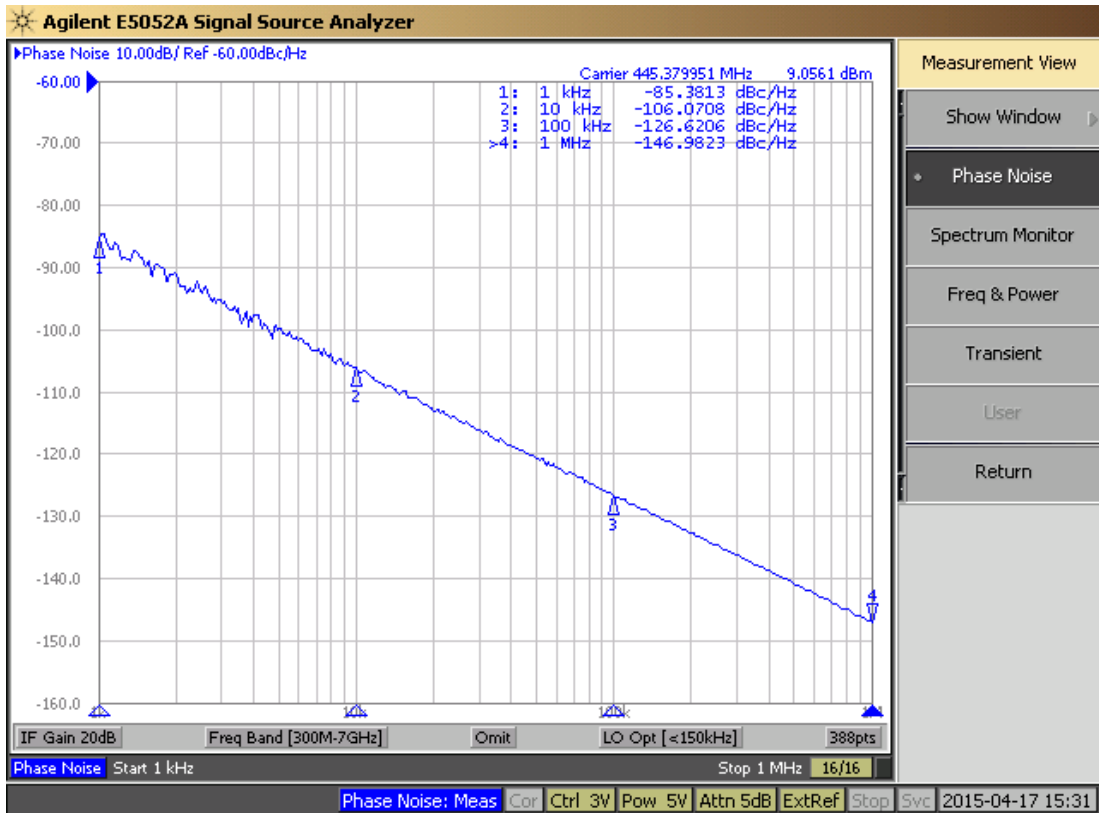

**Measurement View**

Show Window

Phase Noise

Spectrum Monitor


Freq & Power

Transient


User

Return

位相雑音 (Vt=8V)

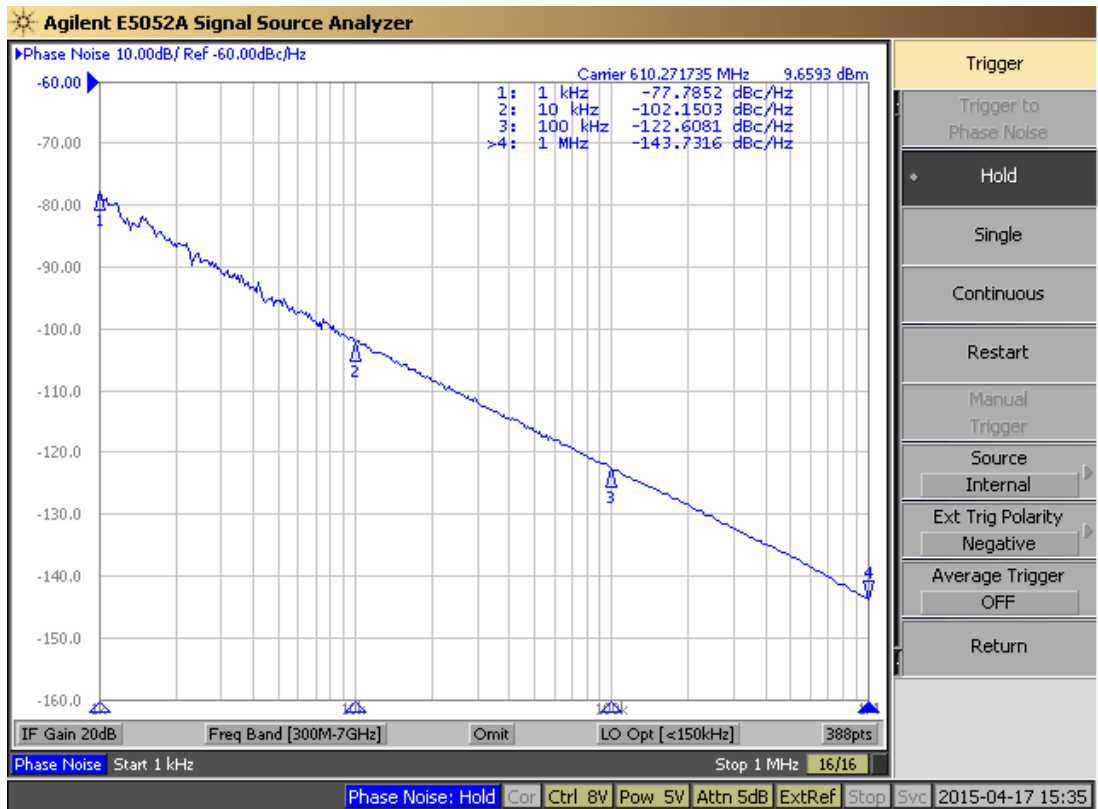

位相雑音 (Vt=16V)

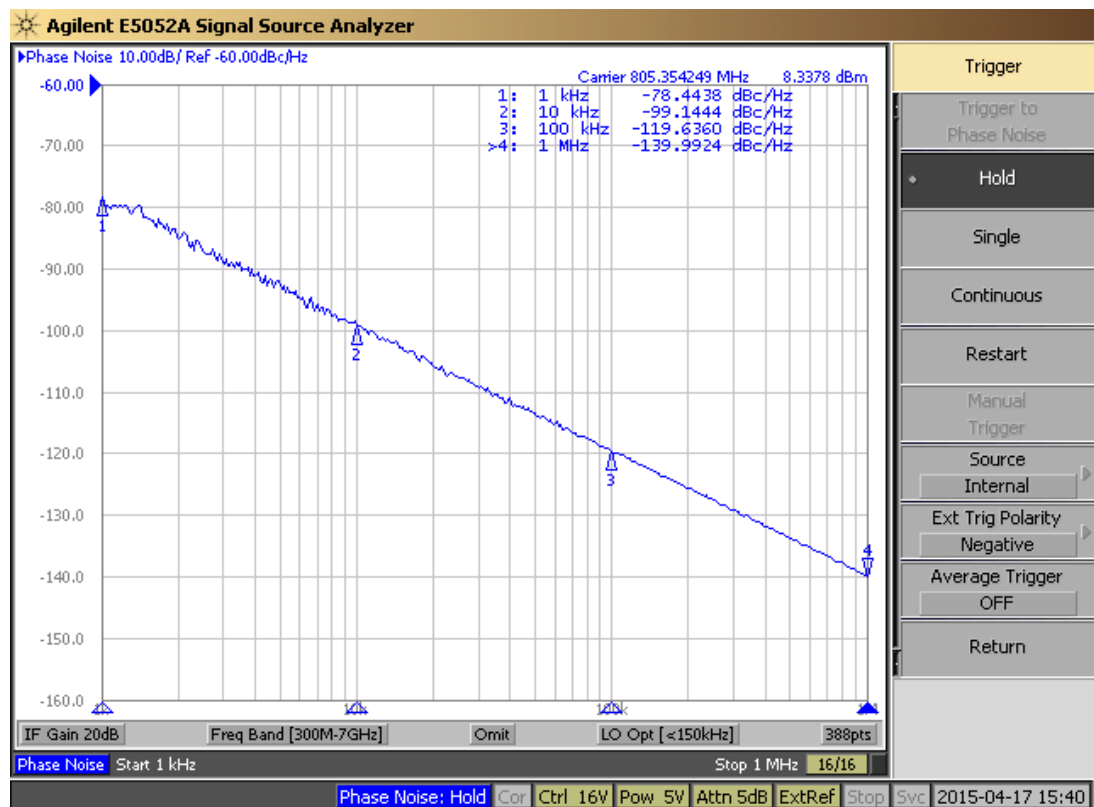

(株)エフエスケイエレクトロ